

Datasheet



120Wp — 125Wp

Polycrystalline solar PV module

Model Number	SN-P120	SN-P125
Maximum Power (pmax)	120Wp	125Wp
Optimum Operating Voltage/Vmp	18.0V	18.0V
Optimum Operating Current/Imp	6.67A	6.94A
Open Circuit Voltage /Voc	21.6V	21.6V
Short Circuit Current /Isc	6.87A	7.14A
Module Efficiency	14.9%	15.5%
Power Tolerance (%)	±3	
Maximum Series Fuse Rating	15A	
Maximum system voltage	1000 V DC	


Maximum Data		
Operating Temperature	-40°C~+80°C	°C
Storage temperature	from -40°C ~+80°C	°C
Instulation cut voltage	1000	DC
Maximum wind resistance	60m/s	N/m² or max Km/h
Surface maximum load capacity	200	Kg/m²
Maximum hail load capacity	25mm	80km/h

EFFICIENCY


-  Low voltage-temperature coefficient allows higher power output at high-temperature condition
-  High efficient, high reliable solar cells ensure our product output stability



Physical Characteristics

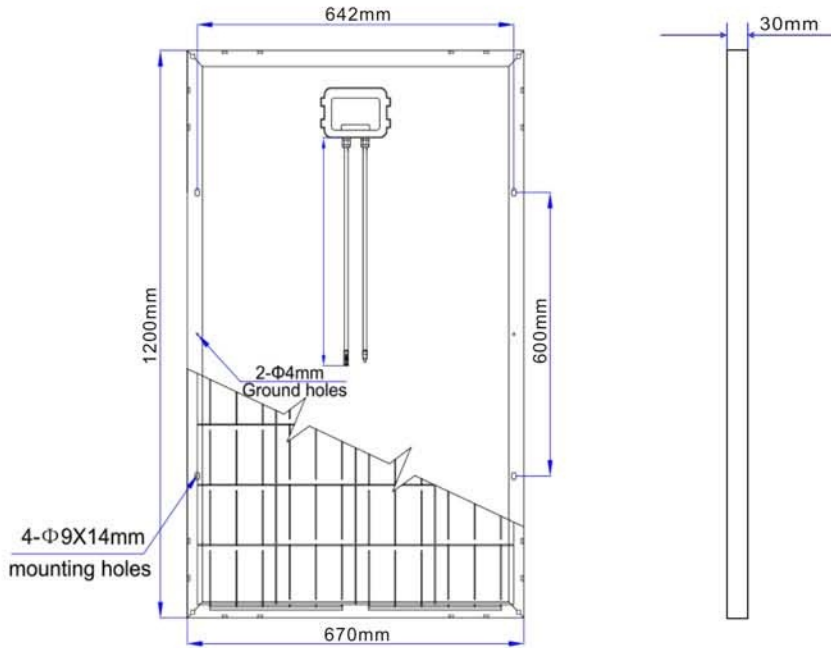

I-V Curve

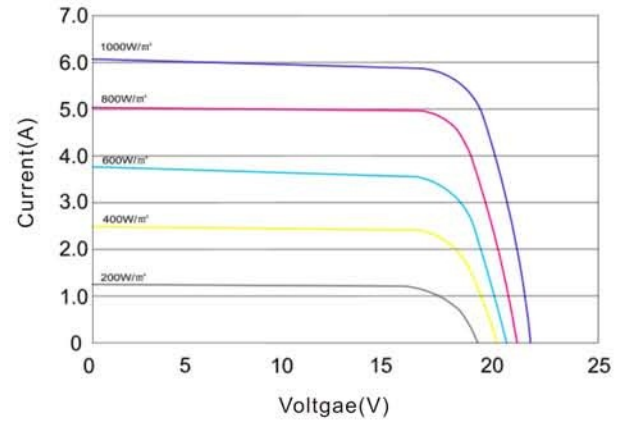

Laminating Data

Cell dimension (mm)	156 x 124.8
Dimensions (mm)	1200x670x30
Number of cells	36(4*9)
Weight	12Kg
Frame Material	Clear anodized aluminium frame
Thickness of glass	3.2 mm tempered glass
Frame	Anodized aluminum alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	Ip65

STC

AM condition	AM1.5
Intensity of illumination	1000W/m ²
temperature	25°C

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.050%/°C

Superior Warranty



- 10** 10-years Manufacturing warranty.
- 12** 12-years warranty 90% power output.
- 25** 25-years warranty 80% power output.