

Datasheet

80Wp-95Wp

Polycrystalline solar PV module

Model Number	SN-P080	SN-P085	SN-P090	SN-P095
Maximum Power (pmax)	80Wp	85Wp	90Wp	95Wp
Optimum Operating Voltage/Vmp	18.0V	18.0V	18.0V	18.0V
Optimum Operating Current/Imp	4.44A	4.72A	5.00A	5.28A
Open Circuit Voltage /Voc	21.6V	21.6V	21.6V	21.6V
Short Circuit Current /Isc	4.64A	4.92A	5.2A	5.48A
Module Efficiency	13%	13.9%	14.7%	15.5%
Power Tolerance (%)	±3			
Maximum Series Fuse Rating	15A			
Maximum system voltage	1000 V DC			

Maximum Data


Operating Temperature	-40°C~+80°C	°C
Storage temperature	from-40°C~+80°C	°C
Instulation cut voltage	1000	DC
Maximum wind resistance	60m/s	N/m ² or max Km/h
Surface maximum load capacity	200	Kg/m ²
Maximum hail load capacity	25mm	80km/h

EFFICIENCY


- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability



Physical Characteristics

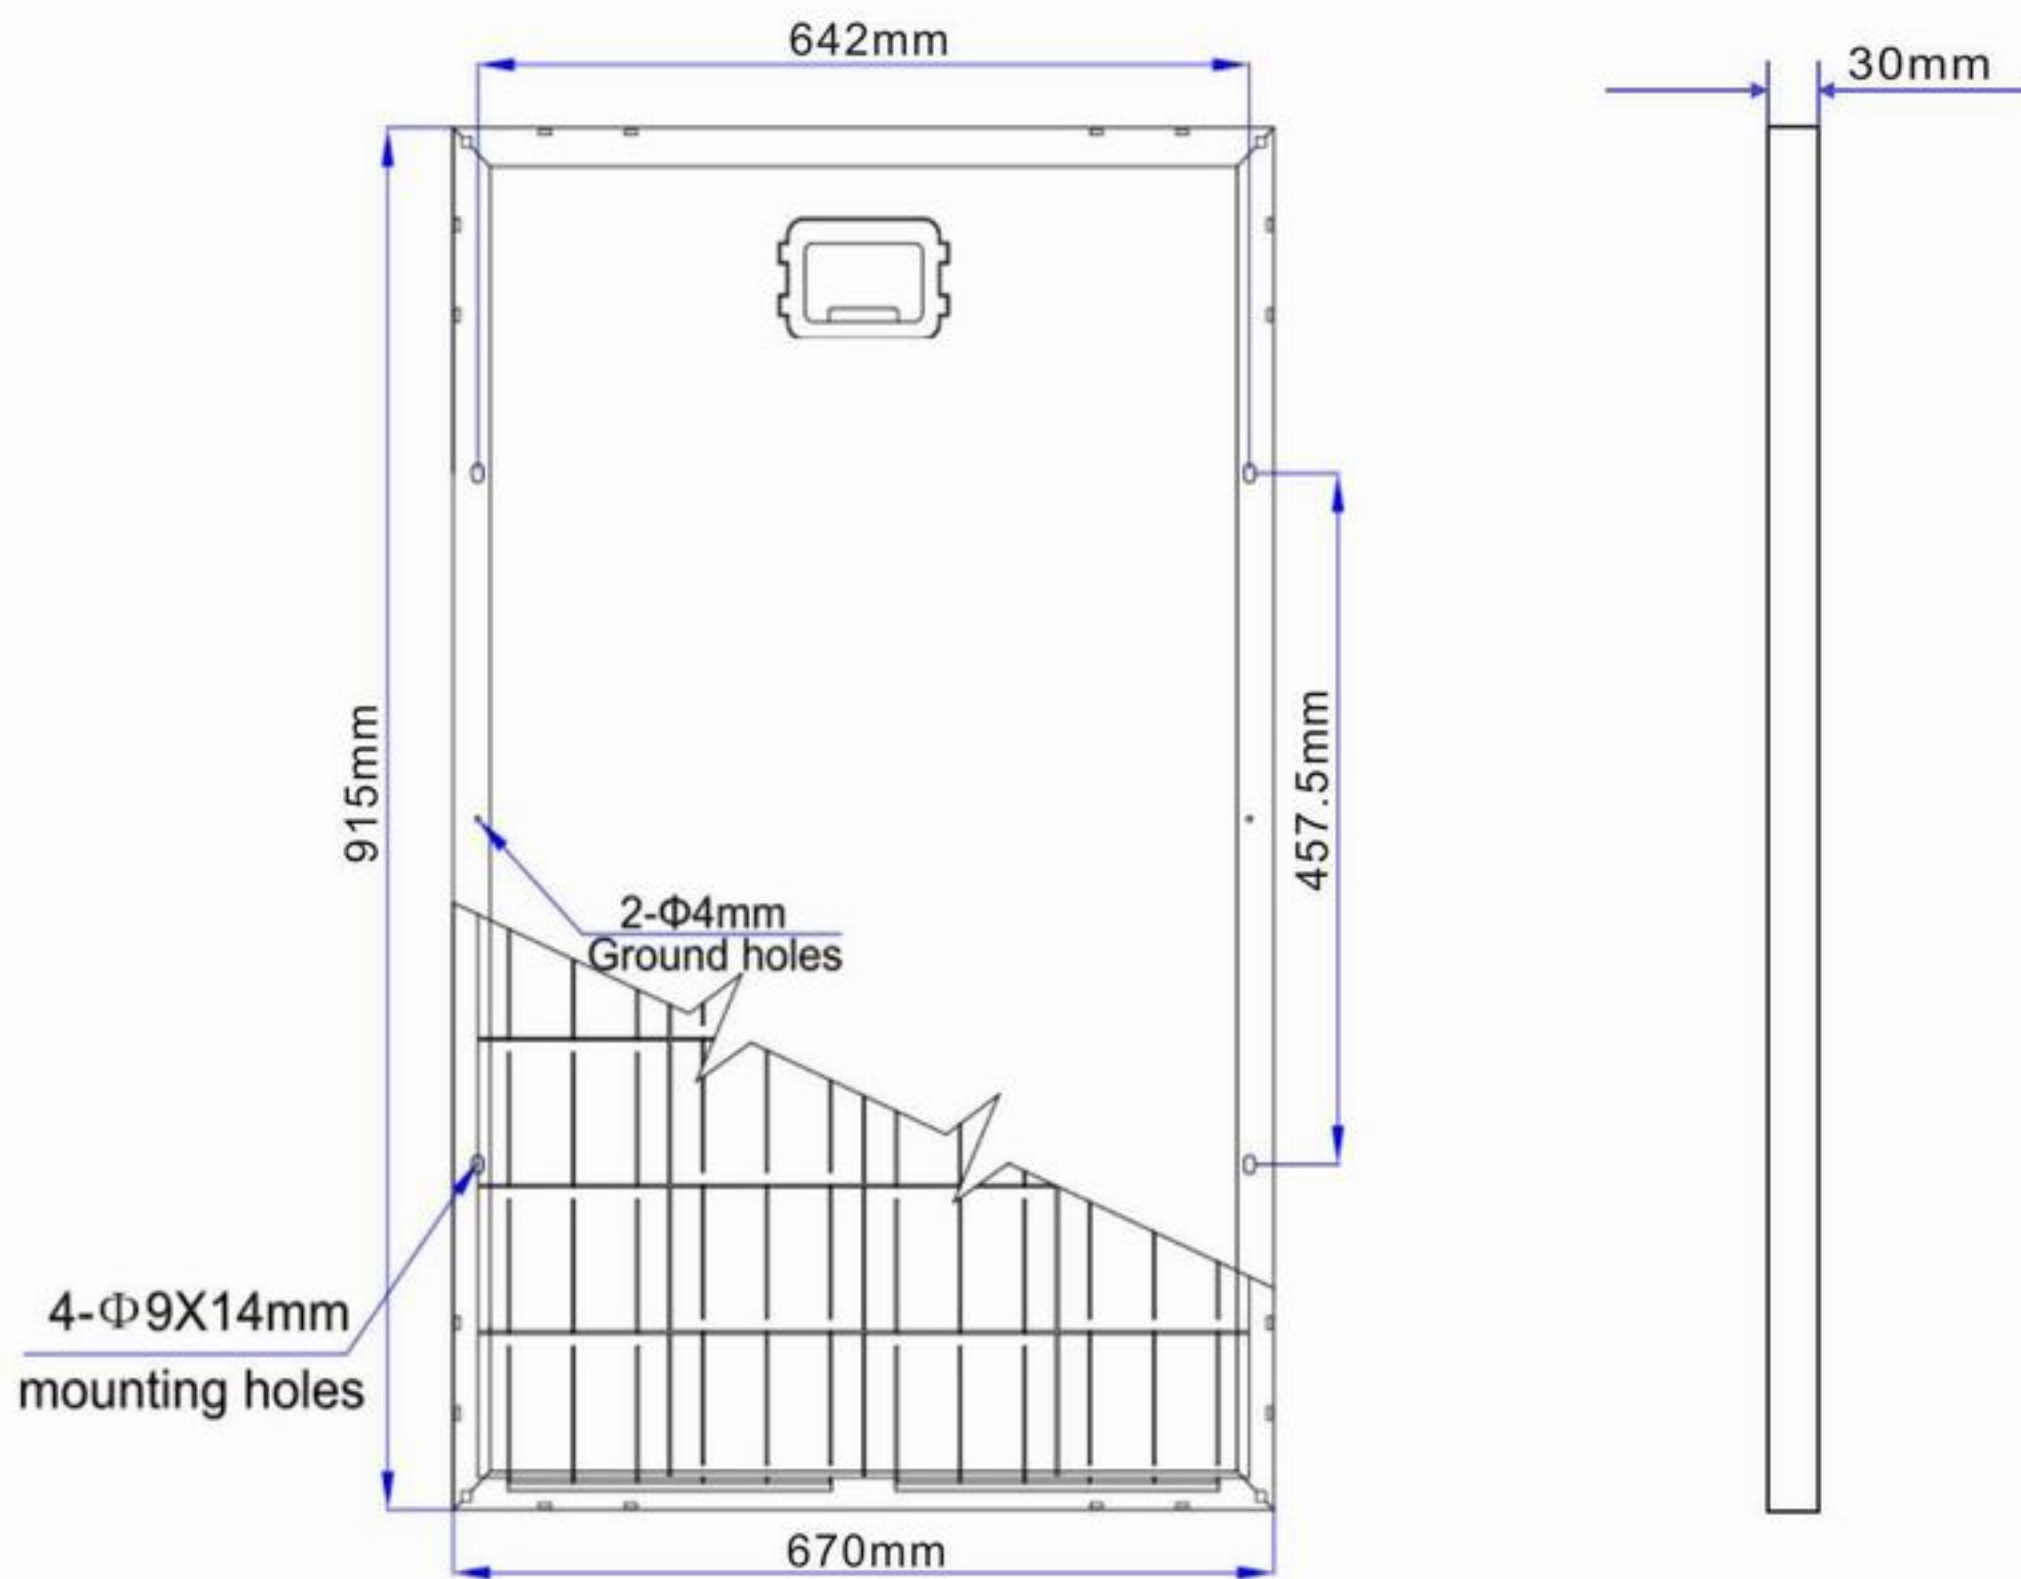

I-V Curve

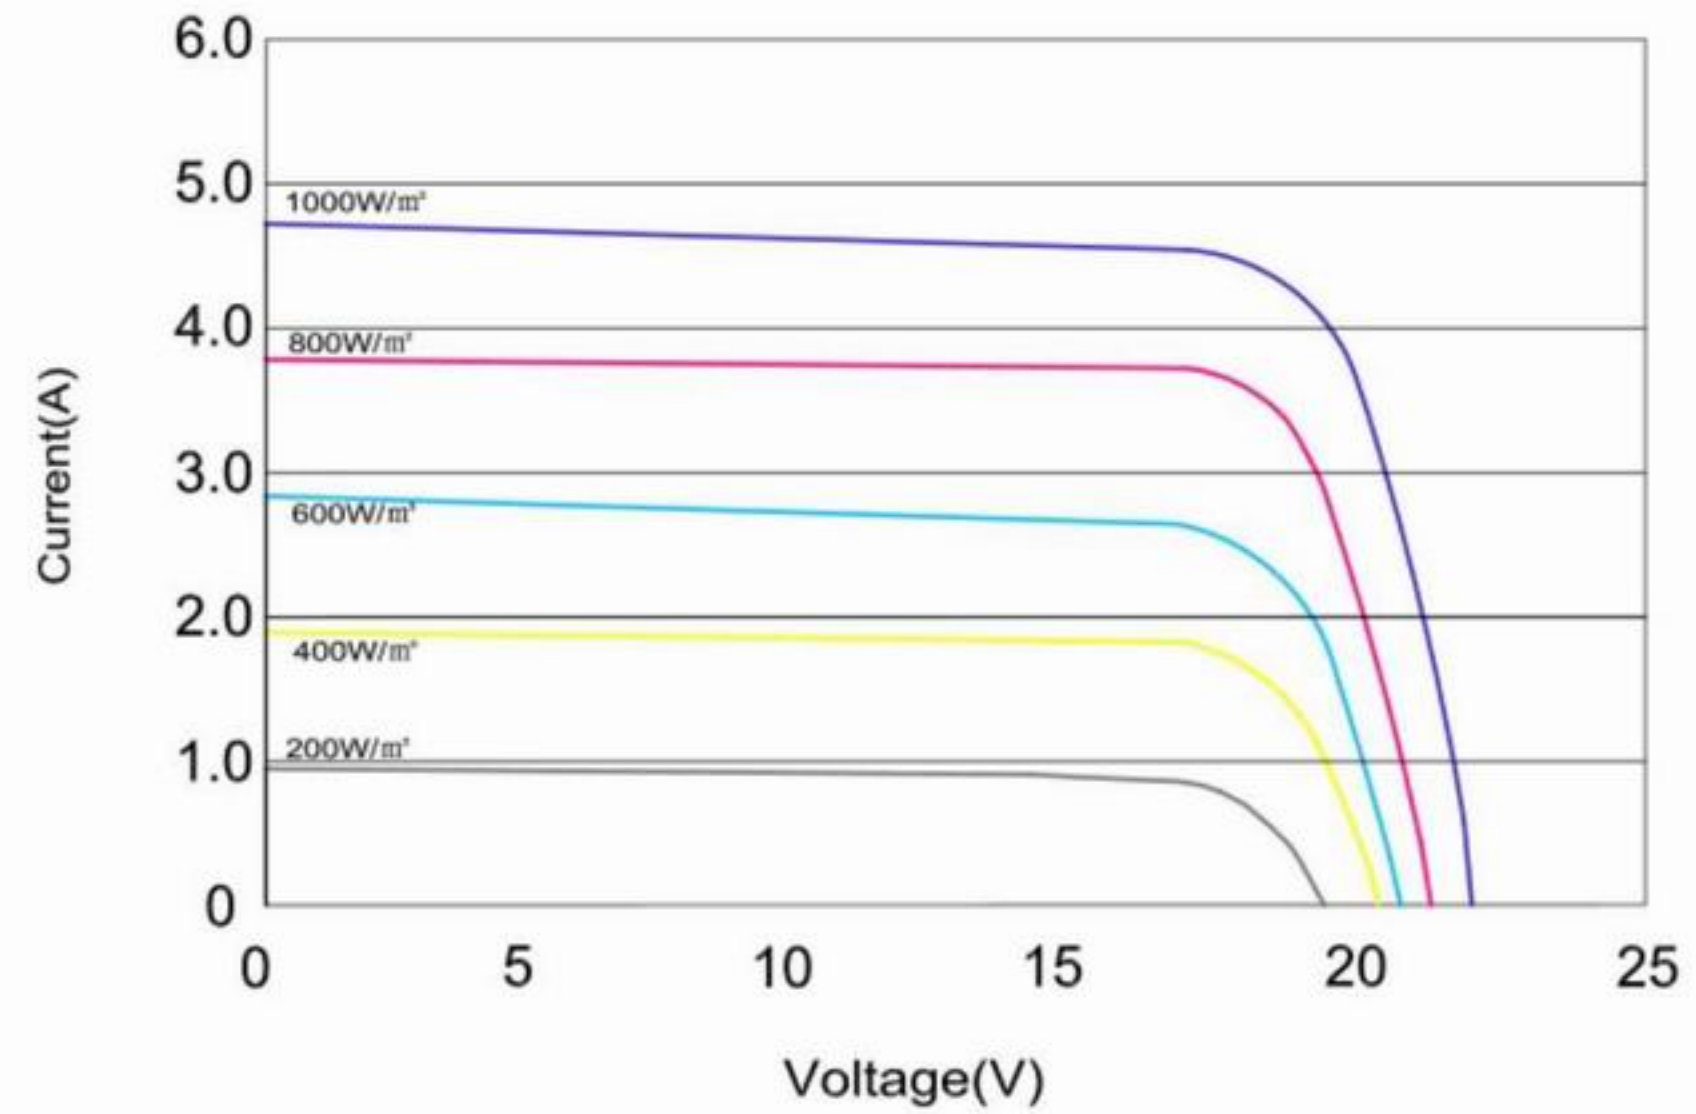

Laminating Data

Cell dimension (mm)	156 x 93.6
Dimensions (mm)	915x670x30
Number of cells	36(4*9)
Weight	8.5Kg
Frame Material	Clear anodized aluminium frame
Thickness of glass	3.2 mm tempered glass
Frame	Anodized aluminum alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	Ip65


STC

AM condition	AM1.5
Intensity of illumination	1000W/m ²
temperature	25°C

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.050%/°C

Superior Warranty

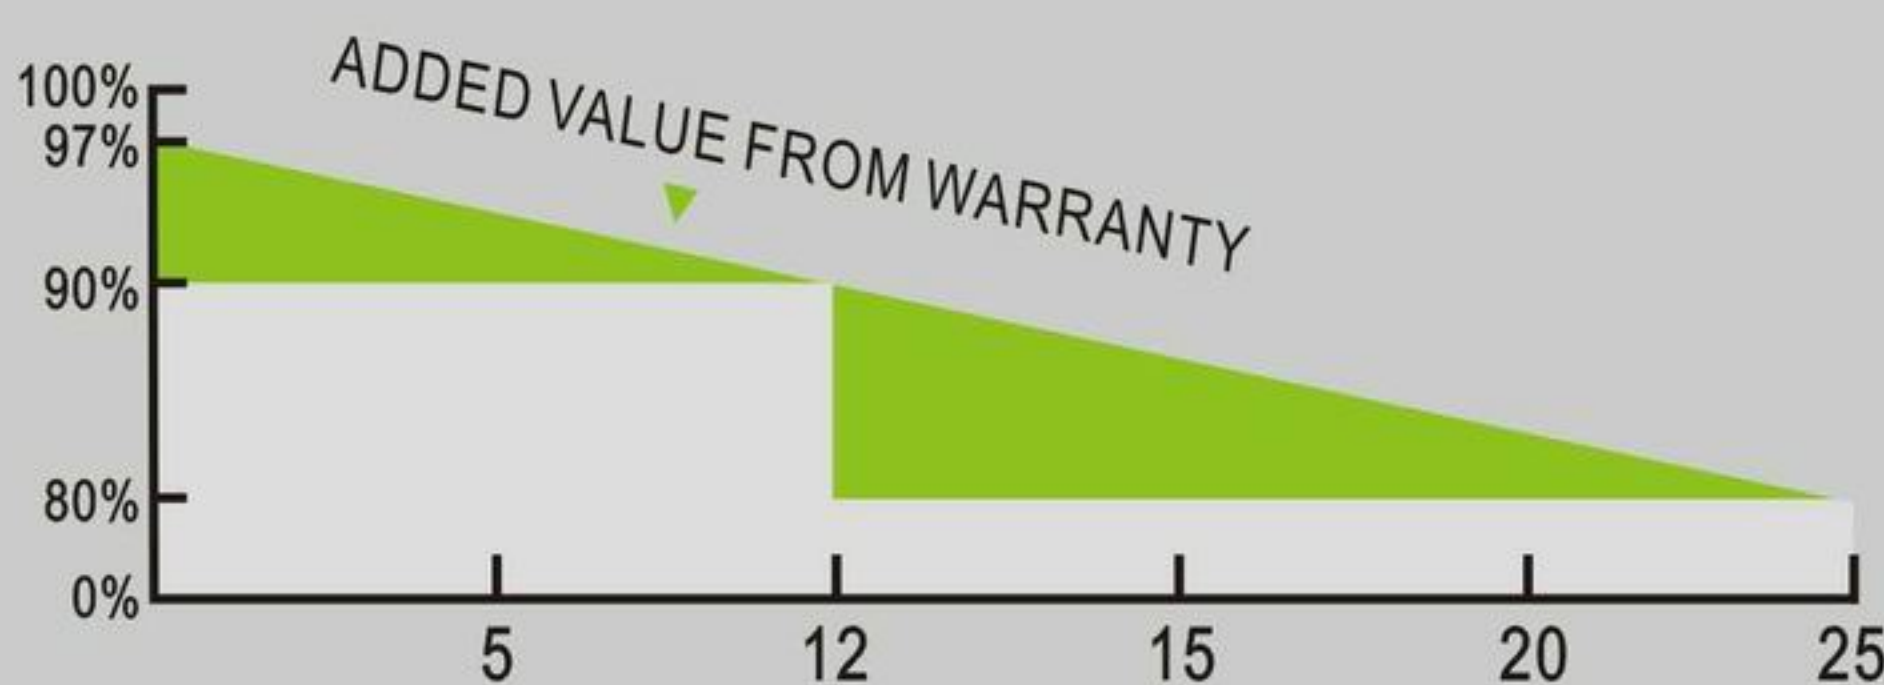

- 10** 10-years Manufacturing warranty.
- 12** 12-years warranty 90% power output.
- 25** 25-years warranty 80% power output.